

PHYSICAL INSTALLATION

1 POSITION INVERTER ENCLOSURE IN 19" OR 23" RACK AND SECURE WITH 12-24 SCREWS AND HARDWARE (8 PLACES).

GENERAL NOTES:

- 1 ALL DIMENSIONS ARE IN INCHES UNLESS OTHERWISE SPECIFIED. DIMENSIONS WITHIN BRACKETS [] ARE IN CENTIMETERS.
- 2 WIRE SYSTEM AS INDICATED IN THE FOLLOWING PAGES.

MECHANICAL DATA

WEIGHT: 1.5KVA = 150 Lbs [68.2 kg]

SIZE: SEE DRAWING AT LEFT
 PAINT: SHERWIN WILLIAMS No. F737XA0853-4320
 COLOR: GRAY

THERMAL DATA


HEAT DISSIPATION @ 100% LOAD
 @ .8 LAGGING pf
 1.5KVA = 2520 BTU/HR MAX.

COOLING: FAN ASSISTED
 OPERATING AMBIENT= 32°F TO +122°F
 (0°C TO +50°C)


ENVIRONMENTAL DATA

NEBA 1= INDOOR DUTY, OPEN VENTILATED, NONCORROSIVE, CONTROLLED ENVIRONMENT PER UL1778, DOES NOT PREVENT ENTRY OF DUST.
 HUMIDITY RANGE: 0 TO 95% NON-CONDENSING
 ALTITUDE DERATING: NONE BELOW 7000 FT.
 10%/1000 FT. ABOVE
 AUDIBLE NOISE: 50dB(A), 5 FT. IN FRONT OF UNIT, 4 FT. FROM FLOOR.

NOTE: REVERSE ANGLES FOR 23" RACK MOUNTING

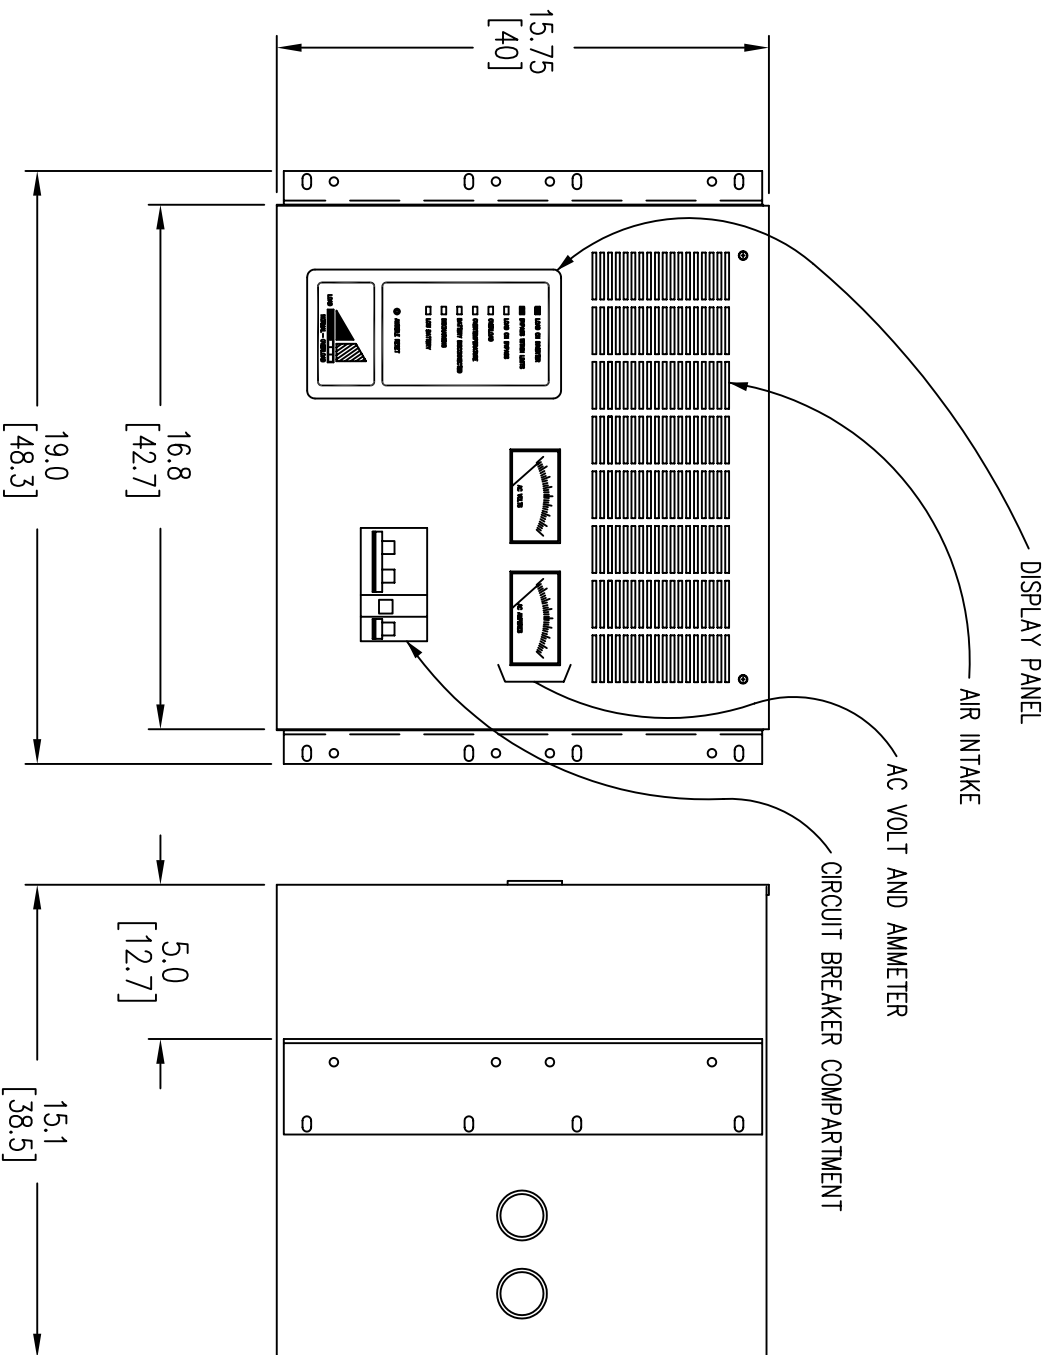


INSTALLER CONNECTIONS		1.5KVA, 24VDC INVERTER SYSTEMS	
DESIGN	DATE		
DRAWN	DATE	IC5194-015	
WALLACE	6-10-98		
CHKD	DATE		
APPD	DATE	SHEET 1 OF 3	
K. AMOROG	6-10-98	ISSUE	

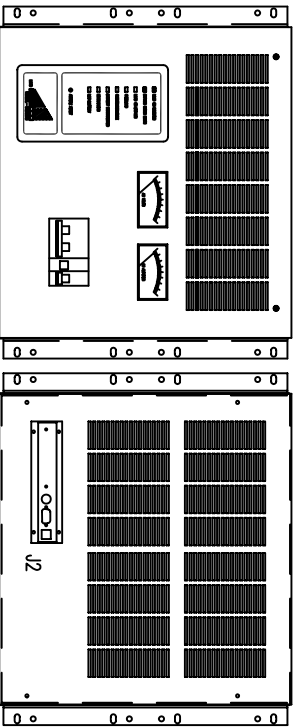

FRONT VIEW

REAR VIEW


NOTE: DC INPUT WIRING ENTERS INVERTER THRU CONDUIT KNOCKOUT ON LEFT SIDE OF ENCLOSURE. BYPASS AC INPUT AND AC OUTPUT WIRING ENTERS THRU CONDUIT KNOCKOUTS ON RIGHT SIDE OF ENCLOSURE.

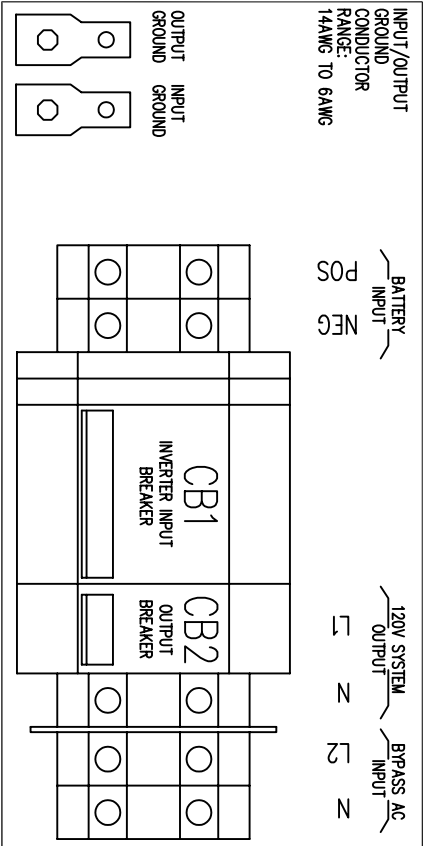

LOWER RIGHT, FRONT (INVERTER)

BYPASS AC INPUT 120V	CONNECT TO L2 & N
-------------------------	----------------------

INVERTER SYSTEM OUTPUT 120V	CONNECT TO L1 & N
--------------------------------	----------------------



ALARM CONTACT PORT
SEE TABLE 1


RIGHT, REAR (INVERTER)

NOTE 1

TABLE 1	(J2) ALARM PIN No.
5	COMMON
6	ON BYPASS (N.O.)
7	LOW BATTERY (N.O.)
8	GEN. ALARM (N.O.)
9	UTILITY FAIL (N.O.)

NOTES:
1 NOT TO EXCEED CLASS 2 LIMITATIONS. REFER TO N.E.C. ARTICLE 725-31, TABLES (a) & (b).

1.5KVA (120V BYPASS INPUT, 120V OUTPUT)

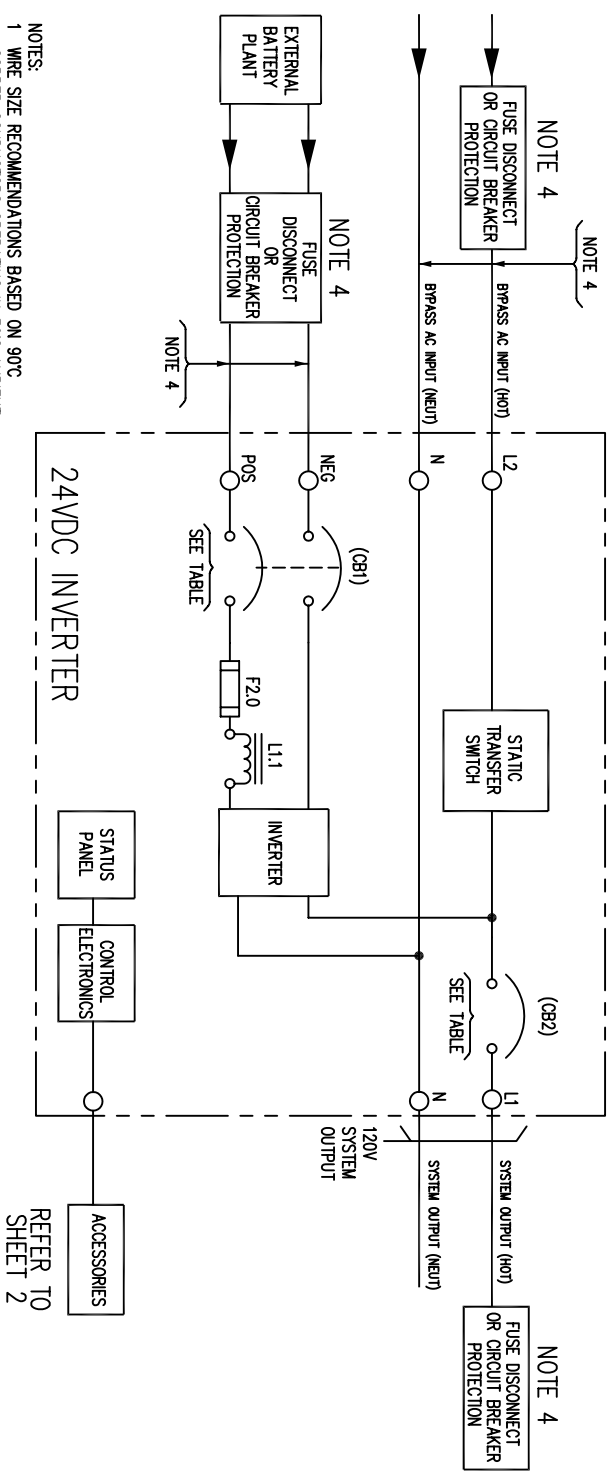

- NOTES:**
- 1 WIRE SIZE RECOMMENDATIONS BASED ON 90°C COPPER CONDUCTORS OPERATING IN 30°C AMBIENT AND NEC TABLES 250-95 & 310-16, INCREASE CONDUCTOR SIZE FOR LONG RUNS.
 - 2 ALL FIELD WIRING TO BE COPPER CONDUCTOR ONLY.
 - 3 ALL GROUNDS SHOWN SHALL BE CONNECTED SEPARATELY TO A SINGLE GROUNDING POINT AT THE SOURCE SERVICE EQUIPMENT, PER IEEE STD. 446-1980 FIG. 72.
 - 4 FUSE OR CIRCUIT BREAKER PROTECTION EXTERNAL TO UPS TO BE PROVIDED BY CUSTOMER. SEE TABLE BELOW FOR RECOMMENDED PROTECTION SIZING AND WIRE SIZING.
 - 5 SPECIFIED TORQUE VALUES ARE FOR INTERNAL WIRING CONNECTIONS ONLY.

SIZE SPEC. No.	BYPASS AC INPUT					BATTERY LEAD					SYSTEM OUTPUT												
	AC INPUT	MAX. LOAD CURRENT	TERM. CAPACITY	TORQUE	RECOM. SIZE	RECOM. FUSING	RECOM. GND. SIZE	(CB1) RATING	NOMINAL VOLTAGE	A.I.C. RATING	TERM. CAPACITY	TORQUE	RECOM. SIZE	RECOM. FUSING	OUTPUT VOLTAGE	FULL LOAD CURRENT (AMPS)	(CB2) RATING	A.I.C. RATING	TERM. CAPACITY	TORQUE	RECOM. SIZE	RECOM. GND. SIZE	RECOM. FUSING
1.5KVA	120	12.5 AMPS	12-2 AWG	35 IN/LB	12 GA	25A	14 GA.	80A (PARALLEL POLED)	24VDC	10,000	12-2 AWG	35 IN/LB	8 GA	150A	120V	12.5 AMPS	20A	10,000	12-2 AWG	35 IN/LB	12 GA	14 GA.	25 AMPS